

PUMP OILERS

GOLDEN ROD

Hydraulic

Easy thumb pressure pumps oil in any direction in controlled volume from 1 drop to a solid stream. Will throw a stream of oil 30 feet and produce 250 lbs. pressure at spout tip. Handles any oil that flows.

For farm machinery, garages, mills, mines, shipyards, shops, factories and oil field equipment.

Extra heavy steel body $3\frac{1}{2}$ inches in diameter, welded steel construction. Precision pumping assembly of rust-proof metal alloy. One piece natural grip steel handle. Easily taken apart for cleaning or repairing.



Standard Spout

Heavy tubing spout with detachable brass tip.

Each			Capacity, pts.	Spout, ins.	Wt. Ctn., lbs.	Each
K3300H	(120)	X2D53	2	12	14	\$3.80
KK3300H	(120)	X2D53—(Case lots 6)				
K3306H	(1020)	X2D27	1	8	12	3.40
KK3306H	(1020)	X2D27—(Case lots 6)				
Six in ctn.						



Flexible Spout

Highest grade flexible spout with short steel fitting at bottom and brass tip.

Each			Capacity, pts.	Spout, ins.	Wt. Ctn., lbs.	Each
K3302H	(120F)	X2D67	2	15	14	\$4.00
KK3302H	(120F)	X2D67—(Case lots 6)				
K3329H	(1020F)	X2D40	1	10	12	3.60
KK3329H	(1020F)	X2D40—(Case lots 6)				
Six in ctn.						



EAGLE

Designed for use on the farm, in the home, factory, work shop, garage or service station.

Delivers one drop or full stream under finger lever control.

Aluminum seamless reinforced beaded body. Seamless brass spout $5\frac{1}{4}$ inches long with detachable cone shaped brass tip. Red cap and finger lever control. Easy to hold, operate and fill. No pump leathers.

Capacity $5\frac{1}{2}$ Ounces

Per Ctn. (6)					▲ Each
K3315H	(33)	X6D00 ★			\$1.50
Six in attractive counter display ctn. Wt. ctn. $4\frac{1}{2}$ lbs.					

EAGLE
HYDRAULIC FORCE FEED
RAINBOW ASSORTMENT

For use on tractors, threshers, automobiles, steam shovels, farm implements and machinery.

Will deliver oil in full stream or a drop at a time under perfect control—pumps any oil that flows all year 'round.

The spout, pump and handle is one detachable unit, easily cleaned and assembled.

New type detachable welded steel bent spouts 6 inches long, with brass couplings and machine cut threads. New type one piece handle and thread protector. Spout and handle coppered.

Solid brass hydraulic pump—no leathers—machined and ground plunger and tube. Ball valves. Height over all $9\frac{1}{4}$ inches.

Seamless drawn steel body, tinned to prevent corrosion—enameled assorted colors—red, blue and green. Genuine double seamed bottom.

Capacity $\frac{3}{4}$ Pint

Assortment consists of six oilers—Assorted colors, red, green and blue.

Per Asst. (6) ▲ Each

K3331H (RD) X6D00 ★ \$1.50

One assortment in an attractive display carton.

Opens like a book—Set up quickly and easily.

Wt. per asst. $4\frac{3}{8}$ lbs.

OILERS

EAGLE

HYDRAULIC PUMP OILERS



K3339H-28



K3341H-2012A

Copperite Finish

Detachable and interchangeable spouts
Positive action pump.

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
	(28)			
K3339H X1D93	1	9	7	\$2.90
	(2912A)			
K3341H X2D27	2	12	8½	3.40
Six in box				




Flexible Spout—Copperite Finish

Detachable and interchangeable spout.
Positive action pump.

Capacity 1 Pint
13 inch Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
K3340H (328) X2D27★				\$3.40
Six in box. Wt. box 7 lbs.				



Super pump. Seamless drawn one-piece beaded brass body. Flanged base prevents tilting. Machine ground brass plunger and bronze ball valves.

"Spark-proof" with a seamless brass spout and detachable brass cone shape grooved tip for easy oiling.

Capacity 6 ounces
4½ inch Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
K3303H (66) X1D51				\$2.26



Super pump. One-piece beaded seamless brass body, machine ground brass plunger and bronze ball valves. Flanged base prevents tilting. ¾ inch diameter asbestos lined flexible steel spout with threaded brass tip and closure cap.

Capacity 6 ounces
6½ inch Flexible Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
K3309H (66F) X1D67				\$2.50

Six in box. Wt. box 3½ lbs.



K3317H-145C



K3323H-159C

Copperite Finish
Dome Shaped

Seamless bodies, double seamed bottom. Reinforced insert type spouts. Precision rolled threads on both spout and can insure perfect fit and prevents leakage.

Capacity ½ Pint
3 inch Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
K3317H (145C) D3C9				\$0.58
Twelve in box. Wt. box 3 lbs.				

Bent Spout Tip
Capacity 1 Pint
9 inch Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
K3323H (159C) D4C8				\$0.72
Twelve in box. Wt. box 5 lbs.				



Welded Steel

Seamless drawn bodies. Bottom electrically welded to body under electronic control. Reinforced insert type steel spouts, brass bushings—machine cut threads. All spouts interchangeable.

Bent Spout

Each	Trade Cap., pts.	Lgth. Spout, ins.	Wt. Box, lbs.	▲ Each
	(3006)			
K3328H D8C1 ½	6	5	\$1.22	
	(5009)			
K3334H X1D00 1	9	7	1.50	
Twelve in box				

STAR ★ DENOTES BEST SELLER

OILERS

EAGLE



One-piece drawn cold rolled steel, heavily electro copper plated and lacquered. Guaranteed genuine double seamed spring steel bottoms. Precision rolled threads that insure perfect fit. $1\frac{1}{2}$ -inch wide mouth openings. Reinforced insert-type spout with leather washer.

Copperite Finish

Dome Top, Straight Spout

Each	Cap., pint	Diam., ins.	Length Spout, ins.	Wt., Box, lbs. ▲	Each
	(133C)				
K3320H	D3C1★	$\frac{3}{4}$	$3\frac{1}{2}$	3	$2\frac{1}{4}$ \$0.46
	(143C)				
K3314H	D3C7	$\frac{3}{4}$	4	3	4 .56
	(155C)				
K3311H	D4C7	1	$4\frac{1}{4}$	5	$5\frac{1}{4}$.70

Twelve in box

MOWING MACHINE

The $1\frac{1}{2}$ -inch wide mouth opening makes it easy to fill without spilling—No funnel necessary.

Seamless drawn one-piece tinned steel body with genuine double seamed special tinned steel bottom. Reinforced insert-type spout with large round easy-working threads. Leather washer. Positively leakproof.

Diameter 3 inches. Height to top of collar $3\frac{3}{4}$ inches. Height over all $7\frac{1}{4}$ inches. Spout 4 inches long.



Economy Assortment

Consists of one dozen $\frac{1}{2}$ -pint oilers—Four each enameled red, green and blue.

Per Assortment	▲ Each
K3327H (701) X3D20—Wt. per assortment	
$3\frac{3}{4}$ lbs.	\$0.48

KX3327H (701) X3D20—(C. L. 12 Assts.)
One assortment in an attractive carton—Opens like a book—Set up quickly and easily.

Capacity $\frac{3}{4}$ Pint
Plain Finishes

(77T)

Each	Finish	Spout	▲ Each
K3329H	D2C3★	Tinned Straight	\$0.34
KX3329H	D2C3★	(Case lots 144)	

Twelve in box, 144 in ctn., Wt. ctn. 48 lbs.

Sold Only In Full Boxes

OILERS

EAGLE



Flexible Spout

Practical for getting into those inaccessible places that cannot be reached with a rigid spout oiler. Spouts have sufficient rigidity to hold a fixed position.

Seamless drawn one-piece high grade cold rolled steel body, with genuine double seamed spring steel bottom. Heavy rolled threads. $1\frac{1}{2}$ -inch wide mouth opening. Reinforced insert-type spout 8 inches long, with asbestos lined rustless flexible steel tubing and new sleeve type metal tips.

Copperite Finish

Each	Cap., pint	Diam., ins.	Wt., Doz., lbs. ▲	Each
	(113)			
K3326H	D5C1	$\frac{3}{4}$	$3\frac{1}{2}$	$3\frac{1}{2}$ \$0.76
	(114)			
K3321H	D5C9★	$\frac{3}{4}$	4	$4\frac{1}{4}$.88

Twelve in a box



New Midget Assortment

Small oilers for light oiling. Long spouts for easy oiling. Ideal for typewriters, recording, transcribing and shaving machines, bicycles, etc.

Dome shaped copperite finish steel body. Reinforced insert-type spout, all sizes interchangeable.

Consists of 8 oilers— $\frac{1}{2}$ oz. capacity and 4 oilers 1 oz. capacity with $4\frac{1}{8}$ inch spouts.

(Midget)

Per Assortment	▲ Each
K3324H X2D00★	\$0.23
Thirty-six asst. in ctn. Wt. ctn. 36 lbs.	



SAFETY CANS

JUSTRITE

Approved by Underwriters Laboratories, Inc.

A safe and sensible way to handle and store explosive or inflammable liquids.

No leakage—No waste.

Efficient and economical.

Equipped with easy, natural opening devices. Cap closes automatically as soon as released.

Safety Feature—Spout cap controlled by strong non-rusting spring which holds cap closed tight. If can is exposed to extreme heat cap opens to release excessive pressure and closes automatically when pressure is relieved.

Heavy lead-coated sheet steel body, double seamed and soldered. Malleable iron handles and nozzles electrically tinned. High gloss red enameled, baked on.



With Trigger Handle

Cap opens when trigger is pulled and closes automatically when released.

(231)

Each	Cap., Gals.	Hgt., ins.	Diam., inches	Wt., lbs. ▲	Each
K3762H	X5D00	1	$11\frac{1}{2}$	$7\frac{1}{4}$	\$7.20
KX3762H	X4D80	(Case lots 6)			

Six in ctn. Wt ctn. 27 lbs.



With Standard Swing Handle

Cap opens when can is tilted by holding handle and raising can for pouring. Closes automatically when in upright position.

Bottom of these cans reinforced by steel ring.

Each	Capacity, gals.	Height, in.	Diam., ins.	Ship. Wt., Net Ctn., lbs. ▲	Each
7-233-H	X6D70	3	$16\frac{1}{2}$	$9\frac{1}{2}$	8 \$9.40
7-235-H	X6D93★	5	17	$11\frac{1}{2}$	10 10.40

One in a carton

NEW DANDY ASSORTMENT

One-piece drawn cold rolled steel, heavily electro copper plated and lacquered. Guaranteed genuine double seamed spring steel bottoms. Precision rolled threads that insure perfect fit. $1\frac{1}{2}$ -inch wide mouth openings. Reinforced insert type spout with leather washer.

Copperite Finish Assortment Consists of:

Nos.	Cap., Pints	Spout	▲ Each
$\frac{1}{2}$ Doz.	133C	$\frac{1}{2}$ 3 in. straight	\$0.42
$\frac{1}{2}$ Doz.	149C	$\frac{1}{2}$ 9 in. bent	.56
$\frac{1}{2}$ Doz.	135C	$\frac{1}{2}$ 5 in. straight	.44

Per Assortment
K3330H (D) X3D67—Wt. per assortment $3\frac{3}{4}$ lbs. \$5.50
Twelve in attractive ctn.—Opens like a book—Set up quickly and easily.

STAR ★ DENOTES BEST SELLER

UTILITY CANS



EAGLE

Welded steel, black enamel finish. Guaranteed against leakage.

Body and breast seamless drawn and welded together electrically.

Each	Capacity, gals.	No. in Ctn.	Wt. Ctn., lbs.	Each
7-62-H X2D60	2	6	21	\$3.90
7-65-H X3D67	5	4	20	5.50

Sold Only in Full Cartons

FILLER CANS

EAGLE

Duo-Pour

Designed for small openings.

All purpose filler can is made from 26 gauge prime galvanized sheets, seamless drawn body with double seamed bottom. 7½ inch long detachable flexible spout, held by wire clip. Spout is equipped with Nos. S1 and S2 Strainer collars and seamless drawn Duo-Pour spout caps.

Larger spout, 1½ inches in diameter—smaller spout, ½ inch diameter. Equipped with an oil measure graduated in ¼, ½ and ¾ pint capacities. Height over all 8½ inches. Diameter 11½ inches.

Capacity 2½ Gallons

Each	F. O. B. St. Louis	Zone 1	Zone 2	Zone 3	Zone 4
61-2½A-H	N-X2D00	X2D08	X2D16	X2D24	X2D32
Four in ctn. Wt. ctn. 15 lbs.					
Sold Only in Full Cartons					

Flexo-Spout

Safe, Convenient and Efficient

For filling gasoline supply tanks anywhere.

Supply valve and air vent automatically opens when spout is turned to pouring position and closes when spout is returned to holder.

Body drawn seamless from 24 gauge steel, breast acetylene welded to body. Tapered brass valve securely fastened to breast and reinforced with a steel brace spot welded to tank. Automatic air vent. Detachable asbestos lined, flexible steel pouring spout 9 inches long, ½ inch diameter outside, with strainer and strainer cap. Bottom reinforced with heavy steel hoop. Ears, spout holder and tilting handle spot welded to body. Gaskets in all filler caps. Bright red finish.



Each	Cap., Gals.	Height, ins.	Diam., ins.	Wt. ctn., lbs.	Each
61-72½-H X4D30	2½	10	11¼	4¾	\$6.45
61-75-H X5D30	5	15½	11¼	7½	7.95
One in ctn.					

OILY WASTE CANS

JUSTRITE

Self Closing

For safety and cleanliness in shop, garage, or store. Eliminates hazard from spontaneous combustion of oily waste and from lighted matches or cigarette butts dropped carelessly.

Inspected and approved by Underwriters Laboratories, Inc.

Heavy galvanized sheet steel beaded body double seamed, with rolled top rim. Extra heavy galvanized sheet steel self closing cover (no springs). Band-iron brace riveted on top. Band iron legs and loop handle, securely riveted. Legs raise body of can 4 inches from floor.



With Foot Lever

Nos.	Size, ins.	Height over all, ins.	Trade cap., gals.	Wt. ctn., lbs.
7-5-H	15½x17	21	14	21

Without Foot Lever

7-1A-H	11¼x13	17	6	12
7-3A-H	13½x15	19	10	15

With Foot Lever

Each	Zone 1	Zone 2	Zone 3	Zone 4
7-5-H	X10D40	X10D80	X11D20	X11D60

Without Foot Lever

7-1A-H	X7D20	X7D47	X7D74	X5D90
7-3A-H	X7D92	X8D24	X8D56	X8D88

One in ctn.

GASOLINE CANS DEFIANCE



For filling marine motors, camp stoves, farm and contractor's machinery.

Heavy galvanized iron, double seamed and soldered. Beaded body. Raised bottom. Filler opening fitted with band iron handle. Spout seamed securely and soldered into breast of can. Detachable flexible spout $\frac{3}{4}$ inch diameter with screw cap, can be fastened over top of can by a metal clip. Heavy tinned wire bail with ebonized bail woods. Enameled red and stenciled "GASOLINE".

Nos.	Cap., Gals.	Opening, ins.	Filler Length, ins.	Spout, ins.	Diam., ins.	Height, ins.	Wt. ctn., lbs.	No. in ctn.
7-D2-H	2	2		9	8 $\frac{1}{4}$	11 $\frac{3}{4}$	17 $\frac{3}{4}$	6
7-D3-H	3	2 $\frac{1}{2}$		12	11 $\frac{3}{4}$	11 $\frac{3}{4}$	14	4
7-D5-H	5	2 $\frac{1}{2}$		12	11 $\frac{3}{4}$	16 $\frac{1}{2}$	20	4
Each	F. O. B.	St. Louis	Zone 1	Zone 2	Zone 3	Zone 4		
7-D2-H	X1D58		X1D64	X1D70	X1D76	X1D82		
7-D3-H	X2D06★		X2D12★	X2D18★	X2D24★	X2D30★		
7-D5-H	X2D23		X2D33	X2D43	X2D53	X2D63		

Sold Only In Full Cartons

Extra Spouts

With Strainer Disc
For Gasoline Cans Nos. D2, D3 and D5
Length 12 inches

Each	Each
K3760H (FS3) D5C5	\$0.85
Loose, Wt. each 2 $\frac{3}{4}$ ozs.	

FILLER CANS EAGLE



Squat Model

Safe, Convenient and Efficient

For filling gasoline supply tanks any where. Supply valve and air vent automatically opens when spout is turned to pouring position and closes when spout is returned to holder.

Body drawn seamless from 24 gauge steel, breast acetylene welded to body. Tapered brass valve securely fastened to breast and reinforced with a steel brace spot welded to tank. Automatic air vent. Detachable asbestos lined, flexible steel pouring spout $\frac{3}{4}$ inch diameter outside, with strainer and strainer cap. Bottom reinforced with heavy steel hoop. Ears, spout holder and tilting handle spot welded to body. Gaskets in all filler caps. Bright red finish.

Capacity 2 $\frac{3}{4}$ gallons. Height over all 10 inches. Diameter 11 $\frac{3}{4}$ inches. Length of spout 9 inches.

Each	Cap. gals.	Height, ins.	Diam., ins.	Wt. Ctn., lbs.	Each
61-72 $\frac{1}{2}$ -H X4D30	2 $\frac{3}{4}$	10	11 $\frac{3}{4}$	4 $\frac{3}{4}$	\$6.45
61-75-H X5D30	5	15 $\frac{1}{2}$	11 $\frac{3}{4}$	7 $\frac{1}{2}$	7.95
	One in ctn.				

For Zone Map see Sec. 30—Page 4
STAR ★ DENOTES BEST SELLER

WATER BAGS EAGLE



No pre-soaking—always ready for use. No musty tastes or odors.

Canvas bag with metal lock-on cap. Streamlined metal handle, designed to fit grip for easy carrying. Handle clamps firmly to bag but is easy to remove for cleaning. Aluminum non-rust nozzle, sanitary and unbreakable, securely riveted to bag.

Each	Cap., gals.	Size, ins.	Wt. ea., lb.	Each
G4725B (EWB1) D9C9	1	11 $\frac{1}{2}$ x11	$\frac{3}{4}$	\$1.39
G4726B (EWB2) X1D06	2	11 $\frac{1}{2}$ x14 $\frac{1}{2}$	$\frac{3}{4}$	1.59

Loose



Traveler


Attractive in appearance. Designed for tourists. No pre-soaking necessary and always ready for instant use.

Sturdy canvas bag, shaped and reinforced to stand up. Will not topple over. Aluminum non-rust nozzle with cap, fastened on a chain.

Removable metal top slide. Rope handle anchored directly to bag through metal eyelets. Size 11 $\frac{1}{2}$ x15 inches.

Capacity 2 gallons

Each	Each
G4727B (ETB2) X1D13	\$1.69
Loose, Wt. ea. $\frac{1}{2}$ lb	

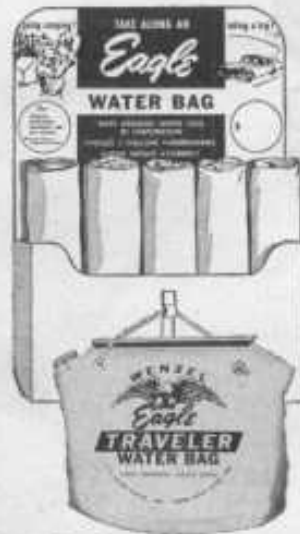

Traveler 6-Pak Display

Rainbow assortment of eye-catching colors.

Assorted two gallon Sahara Traveler bags keep water cool by evaporation. Compact and unbreakable.

Per Asst. (6)	Each
61-6PAK-B X7D93	\$1.98

One asst. in ctn. Wt. ctn. 5 $\frac{1}{2}$ lbs.

Sold Only In Full Cartons